



Schlüssellochfender WGKH

Schlüssellochfender eignen sich durch ihre Aussparung besonders gut zur Montage an gerundeten Konturen (Bug- und Heckpartie von Schleppern, Molenköpfen usw.). Durch kleine Einzelabmessungen lassen sich die Teile zu formschönen Fenderschilden zusammenstellen.

Zu den Merkmalen zählen:

- leicht S-förmige Federkennung
- Reibungsschluss bleibt auch bei kleinem Anstellwinkel voll erhalten
- leichte Montage, auch an gewölbten Flächen
- leichtes Auswechseln einzelner Bauteile




Key Hole Fenders WGKH

Key Hole Fenders are suitable for fendering rounded contours (bow and stern section of tugs, pierheads, and so on) due to the keyhole cut-out. These compact fenders can be combined to effective and attractive fender shields.

Features include:

- light S-shaped spring curve
- friction contact is fully maintained even at a small angle of incidence
- easy to install, also on curved surfaces
- single components are easy to replace

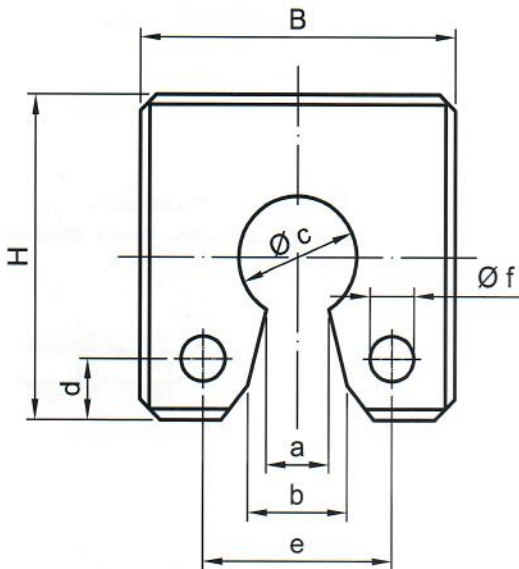

Abmessungen / Dimensions

Typ / Type	H x B x L mm	Oberfläche / Surface mm	a mm	b mm	Ø c mm	d mm	e mm	Ø f mm	Gewicht / Weight ca. / approx. kg
WGKH 6361	250 x 250 x 250	glatt / smooth	50	70	100	50	150	33	14,0
WGKH 6362	250 x 250 x 250	gerieft / ribbed	50	70	100	50	150	33	14,0
WGKH 6363	300 x 300 x 200	gerieft / ribbed	60	90	115	60	180	33	15,5

Abmessungen / Dimensions

Typ / Type	H x B mm	Oberfläche / Surface mm	L m	a mm	b mm	Ø c mm	d mm	e mm	Ø f mm	Gewicht / Weight ca. / approx. kg/m
WGKH 6350	200 x 200	glatt / smooth	0,3 - 3	40	40	75	38	120	28	37
WGKH 6351	250 x 250	glatt / smooth	0,3 - 3	50	70	100	50	150	33	58
WGKH 6352	300 x 300	glatt / smooth	0,3 - 3	60	90	115	60	180	33	86
WGKH 6353	350 x 350	glatt / smooth	0,3 - 3	60	122	125	70	210	33	116