

Z811/...

Verschlussnippel, mit Absperrventil
Shut-off nipple, with valve
Raccord rapide, avec vanne d'arrêt


Mat.: 2.0401



Medium	max. C°
Luft /air/air	200
Öl /oil /huile	200
Wasser / water / eau	150

 Schlauchgrenzwerte können abweichen!
Hose limits can differ!
Les valeurs limites des tuyaux peuvent différer!

Mit Dichtmittel beschichtet
Coated with sealing compound
Recouvert avec ruban d'étanchéité

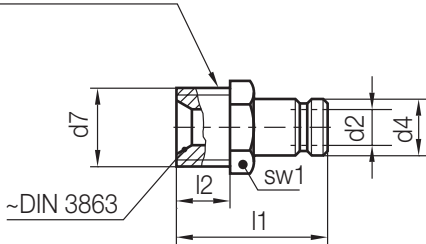

Z80/...
Z80HT /... Z80PL/...
◀ Z802/... Z803/...
Z805/...
Z807/... Z807HT/...
Z80700HT/... Z80701HT/...
Z82/...



p [bar]	sw1	l2	l1	d2	d4	d7	Nr. / No.	
25	9	5	28	2,7	5	M 5 x 0,5	Z811/ 5 x 5x0,5	
		7	30			M 8 x 0,75	8x0,75	
	15	12	29	6	9	M 14 x 1,5	9 x 14x1,5	
		8	40			G 1/4 A	G 1/4	
			G 1/8 A			G 1/8		
	17	12	30	9	13	G 3/8 A	G3/8	
	15	11	30			9	M 14 x 1,5	13 x 14x1,5
	17	12					M 16 x 1,5	16x1,5
	19	11		M 18 x 1,5			18x1,5	
	22	12	30	9		13	G 1/2 A	G 1/2
	15						G 1/4 A	G 1/4
	17				G 3/8 A		G3/8	
	27	16	51	13	19	M 24 x 1,5	19 x 24x1,5	
	22	12	47			G 1/2 A	G 1/2	
	27	16	51			G 3/4 A	G3/4	